MODEL: 50021SL

ASSEMBLY INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS

READ INSTRUCTIONS ALL THE WAY THROUGH PRIOR TO ASSEMBLY.

THIS ITEM SHOULD TAKE APPROXIMATELY 10 MINUTES TO ASSEMBLE.

MAKE SURE ALL PARTS ARE FIRMLY TIGHTENED.

UNPACK THE FOUNTAIN

YOU SHOULD HAVE RECEIVED THE FOLLOWING PARTS: COLUMN, RESERVOIR, PUMP, UPPER BASE, LOWER BASE AND EXTRA RUBBER STOPPLE.

NOTE: THIS ITEM CAN BE USED AS FOUNTAIN OR BIRD BATH. IF USE AS FOUNTAIN FOLLOW INSTRUCTIONS BELOW. IF USE AS BIRD BATH PROCEED TO PAGE 3/3.

FOUNTAIN ASSEMBLY

1. PLACE UPPER BASE ONTO LOWER BASE.

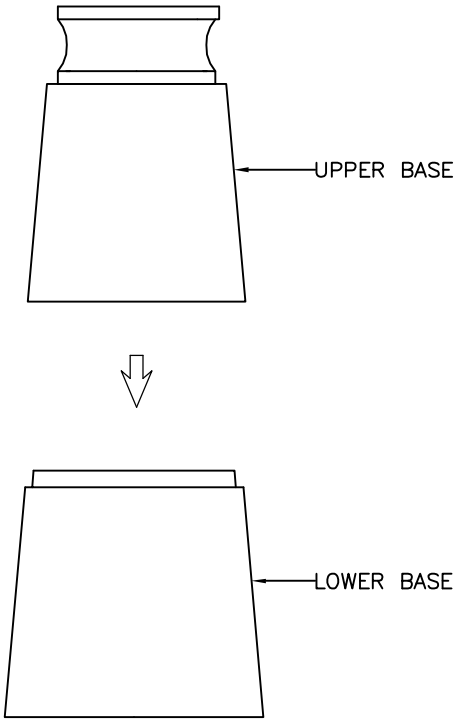

2. FEED THE PUMP POWER CORD THROUGH BASES TOWARD BOTTOM OF LOWER BASE, CORD EXIT OUT FROM CHANNEL ON THE BOTTOM OF THE LOWER BASE.

3. PLACE RESERVOIR ON TOP OF UPPER BASE AND ROTATE THE RESERVOIR CLOCKWISE TO SECURE.

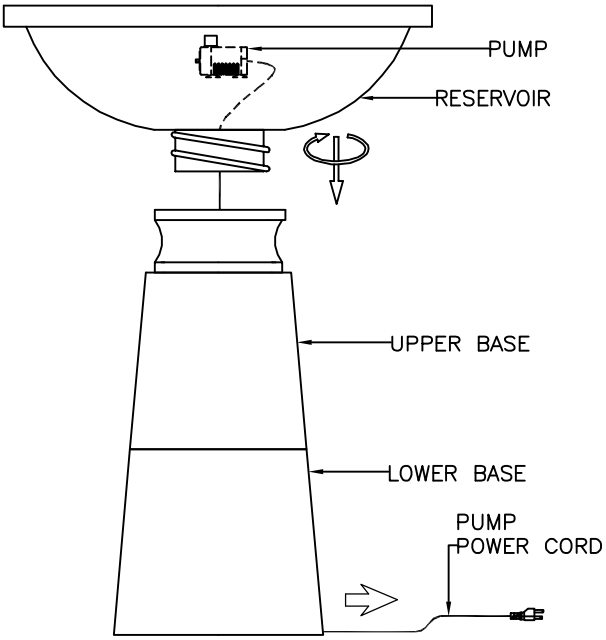

4. ATTACH PUMP TO RUBBER HOSE.

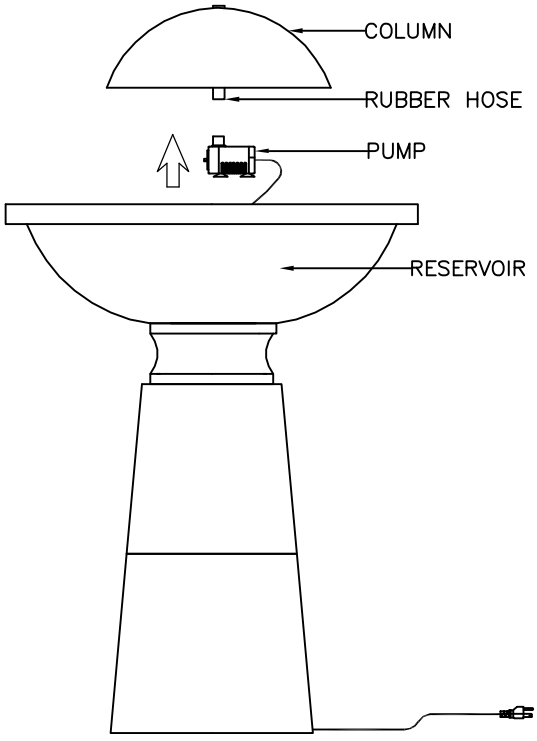

MODEL: 50021SL

ASSEMBLY INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS

5. PLACE COLUMN WITH PUMP INTO RESERVOIR.

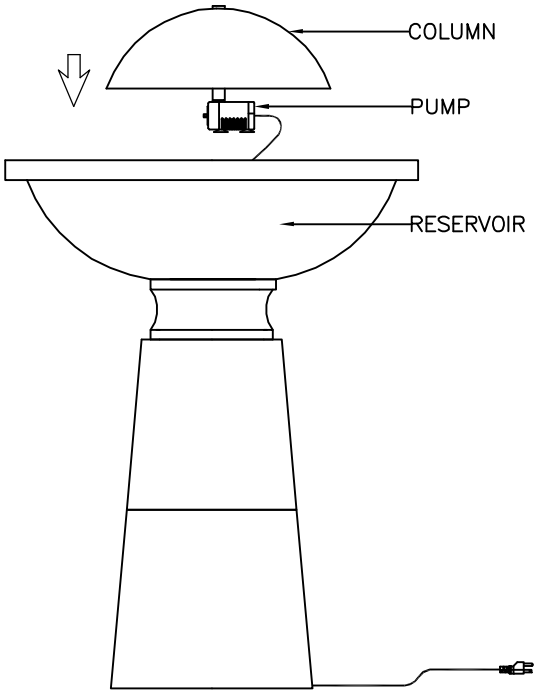

6. FILL RESERVOIR WITH 0.9 GALLONS OF WATER TO COMPLETELY SUBMERSE THE PUMP.

NOTE: DISTILLED WATER IS RECOMMENDED TO REDUCE MINERAL DEPOSITS AND BACTERIA BUILD-UP.

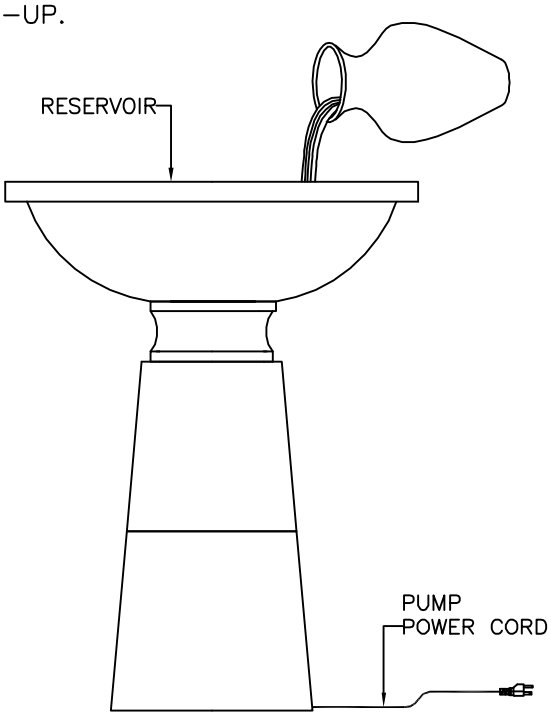

7. TEST WATER RUNNING, ADJUST THE WATER VALVE ON PUMP IF NEEDED.

8. PLUG PUMP POWER CORD INTO OUTLET, YOUR NEW FOUNTAIN IS READY FOR USE.

TROUBLE SHOOTING:

1. IF YOUR FOUNTAIN DOES NOT WORK, CHECK PLUG AT THE SOCKET. MAKE SURE THE PLUG IS FULLY AND PROPERLY INSERTED INTO THE WALL OUTLET.

2. NEXT CHECK TO MAKE SURE THE OUTLET IS POWERED.

3. IF THE FOUNTAIN STILL DOES NOT WORK, PLEASE CONTACT YOUR DISTRIBUTOR OR PLACE OF PURCHASE.

IMPORTANT PUMP INFORMATION:

PUMP MUST BE FULLY SUBMERSED IN WATER WHILE OPERATING. PLEASE SEE NEXT PAGE FOR PUMP REPLACEMENT.

SPLASHING DISCLAIMER:

SPLASHING MAY OCCUR WHEN FOUNTAIN IS INITIALLY TURNED ON. PROTECT SURROUNDING SURFACES AS NEEDED.

WATER:

TO REDUCE MINERAL DEPOSITS AND BACTERIA BUILD UP THE USE OF DISTILLED WATER IS RECOMMENDED.

WARNING:

* ONCE A WEEK INSPECT FOUNTAIN, FLOOR AND ADJACENT WALL FOR MOISTURE BUILD-UP AND CLEAN AS NECESSARY. THIS IS ESPECIALLY IMPORTANT FOR HUMID ENVIRONMENTS.

** THIS FOUNTAIN IS RATED FOR OUTDOOR USE.

*** THIS UNIT MUST BE CONNECTED TO A SUPPLY CIRCUIT THAT IS PROTECTED BY A GROUND FAULT CIRCUIT INTERRUPTER (GFCI). THE GFCI SHOULD BE TESTED ON A ROUTINE BASIS. TO TEST THE GFCI, PUSH THE TEST BUTTON. THE GFCI SHOULD INTERRUPT POWER. PUSH THE RESET BUTTON. POWER SHOULD BE RESTORED. IF THE GFCI FAILS TO OPERATE IN THIS MANNER, THE GFCI IS DEFECTIVE.

MODEL: 50021SL

ASSEMBLY INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS

READ INSTRUCTIONS ALL THE WAY THROUGH PRIOR TO ASSEMBLY.

THIS ITEM SHOULD TAKE APPROXIMATELY 10 MINUTES TO ASSEMBLE.

MAKE SURE ALL PARTS ARE FIRMLY TIGHTENED.

UNPACK THE FOUNTAIN

YOU SHOULD HAVE RECEIVED THE FOLLOWING PARTS: COLUMN, RESERVOIR, PUMP, UPPER BASE, LOWER BASE AND EXTRA RUBBER STOPPLE.

NOTE: THIS ITEM CAN BE USED AS FOUNTAIN OR BIRD BATH, IF USE AS BIRD BATH FOLLOW INSTRUCTIONS BELOW, IF USE AS FOUNTAIN PROCEED TO PAGE 1/3.

BIRD BATH ASSEMBLY

1. REOMOVE THE PUMP AND RUBBER STOPPLE FROM BIRD BATH BY PULLING THE CORD.

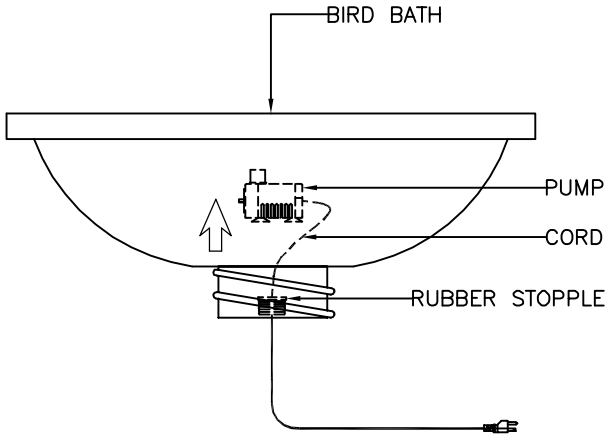

2. INSERT THE EXTRA RUBBER STOPPLE (INCLUDED) INTO THE HOLE IN BIRDBATH.

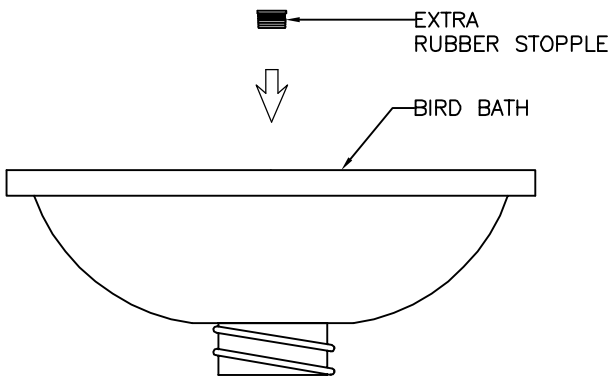

3. PLACE UPPER BASE ONTO LOWER BASE.

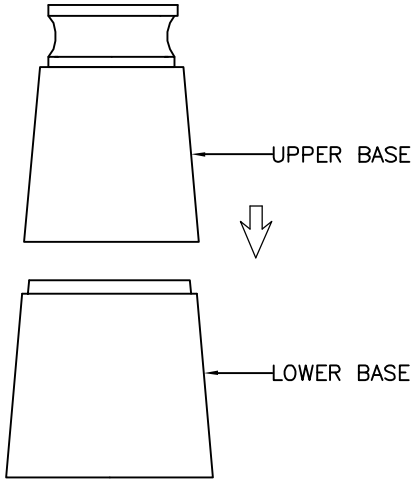

4. PLACE BIRD BATH ON TOP OF UPPER BASE AND ROTATE THE BIRD BATH CLOCKWISE TO SECURE.

5. YOUR NEW BIRD BATH IS READY FOR USE.